



MicroSpeaker

Miniature loudspeaker range for discrete installations

i product information

The MicroSpeaker range comprises of two differing miniature loudspeaker models that are both very easy to integrate into a dividing wall or various cabinets / shelving.

Regarding the size, this miniature loudspeaker range offers exceptional sound quality.

Mini size and brackets included

Easy to integrate and hide

Tropicalisation

Protects against humidity for extreme conditions

High sound quality

Faithful reproduction of the original audio source

RSF - EXTREME Products

Reliability... EXTREME

- Designed for 24/7/365 operation.
- Fully solid state with no moving parts.

Service... EXTREME

- 2 or 3-years swap warranty within 24 hours.

References... EXTREME

Our customers range from the smallest regional museums to the largest attraction parks. Some of our important references: Disneyland Paris (FR), 'Futuroscope de Poitiers' (FR), the City of Sciences, Paris (FR), British Museum, London (UK), Stonehenge (UK)...



Commercial Division

RSF Europe SA
rue de l'industrie, 18
L-8399 Windhof
G. D. of Luxembourg

Tel. +352 49 74 20 40
Fax +352 49 74 20 50
info@rsf-int.com
www.rsf-int.com



Manufacturer

RSF
45, Avenue Marcel Dassault
(Parc de la Plaine)
31500 Toulouse - France

Tel. +33 5 61 20 79 09
Fax +33 5 61 80 00 94



Technical specifications for MicroSpeaker1

Audio parameters

Bandwidth see the frequency response curve
Power 5W

Enclosure black ABS/PC

Cable PVC

Dimensions 58mm diam; 51mm depth

Weight 250 Gr

Environment

Temperature -25°C to 75°

Relative humidity 0-90%

Warranty 3 years

Technical specifications for MicroSpeaker2

Audio parameters

Bandwidth see the frequency response curve
Power 5W

Enclosure black ABS/PC

Cable PVC

Dimensions 106x60x58 mm (L x P x H)


Weight 300 Gr

Environment


Temperature -25°C to 75°

Relative humidity 0-90%

Warranty 3 years

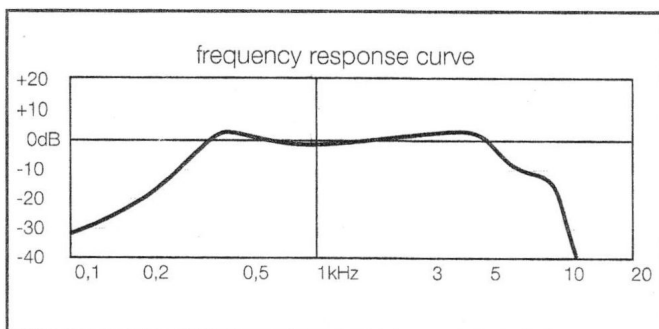

MicroSpeaker1

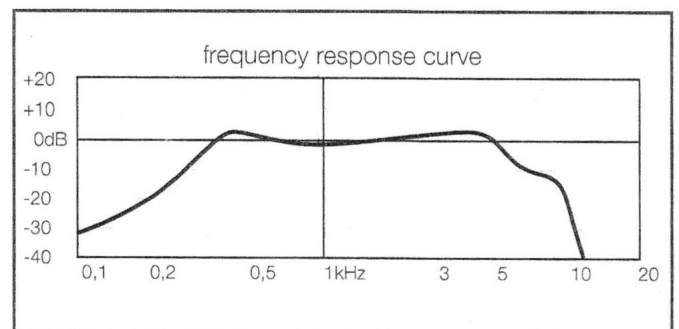

MicroSpeaker2